


| Code | µF | a | Øb | c | Boîtier / Housing / Gehäuse | Fils / Wires / Verdrahtung | U _{max} | T°C |
|-------|-----|----|----|----|-----------------------------|----------------------------|------------------|---------------|
| 19001 | 0,5 | 35 | 21 | 8 | Aluminium | 0,50 | 400 Volts | -25°C / +85°C |
| 19040 | 1 | 48 | 21 | 8 | Aluminium | 0,50 | 400 Volts | -25°C / +85°C |
| 19005 | 1,5 | 48 | 21 | 8 | Aluminium | 0,50 | 400 Volts | -25°C / +85°C |
| 19008 | 2 | 48 | 21 | 8 | Aluminium | 0,50 | 400 Volts | -25°C / +85°C |
| 19011 | 2,5 | 48 | 25 | 8 | Aluminium | 0,50 | 400 Volts | -25°C / +85°C |
| 19012 | 3 | 48 | 25 | 8 | Aluminium | 0,50 | 400 Volts | -25°C / +85°C |
| 19049 | 3,5 | 48 | 25 | 8 | Aluminium | 0,50 | 400 Volts | -25°C / +85°C |
| 19019 | 4 | 66 | 25 | 8 | Aluminium | 0,50 | 400 Volts | -25°C / +85°C |
| 19053 | 4,5 | 66 | 25 | 8 | Aluminium | 0,50 | 400 Volts | -25°C / +85°C |
| 19131 | 5 | 49 | 30 | 8 | Aluminium | 0,50 | 400 Volts | -25°C / +85°C |
| 19016 | 6 | 66 | 28 | 8 | Aluminium | 0,50 | 400 Volts | -25°C / +85°C |
| 19248 | 7 | 66 | 28 | 8 | Aluminium | 0,50 | 400 Volts | -25°C / +85°C |
| 19147 | 8 | 66 | 32 | 8 | Aluminium | 0,50 | 400 Volts | -25°C / +85°C |
| 19065 | 10 | 66 | 35 | 8 | Aluminium | 0,50 | 400 Volts | -25°C / +85°C |
| 19061 | 12 | 84 | 35 | 8 | Aluminium | 0,50 | 400 Volts | -25°C / +85°C |
| 19140 | 14 | 66 | 40 | 8 | Aluminium | 0,50 | 400 Volts | -25°C / +85°C |
| 19149 | 16 | 84 | 35 | 8 | Aluminium | 0,50 | 400 Volts | -25°C / +85°C |
| 19067 | 18 | 68 | 45 | 10 | Aluminium | 0,50 | 400 Volts | -25°C / +85°C |

CONDENSATEURS UL / UL CAPACITORS / UL KONDENSATOR

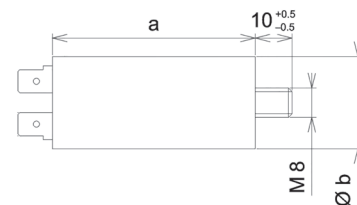

| Code | µF | a | Øb | c | Boîtier | Connectique | U _{max} | T°C | Disposition |
|---------|-----|----|----|----|-----------|---------------|------------------|---------------|-------------|
| 19208-0 | 1,5 | 49 | 25 | 10 | Plastique | Cosses 2.8mm | 425 Volts | -25°C / +70°C | D |
| 19217-0 | 2 | 49 | 25 | 10 | Plastique | Cosses 6.35mm | 425 Volts | -25°C / +70°C | D |
| 19218-0 | 2,5 | 55 | 25 | 10 | Plastique | Cosses 6.35mm | 425 Volts | -25°C / +70°C | D |
| 19219-0 | 3 | 55 | 25 | 10 | Plastique | Cosses 6.35mm | 425 Volts | -25°C / +70°C | D |
| 19232-0 | 3,5 | 55 | 28 | 10 | Plastique | Cosses 6.35mm | 425 Volts | -25°C / +70°C | D |
| 19220-a | 4 | 55 | 28 | 10 | Plastique | Cosses 6.35mm | 425 Volts | -25°C / +70°C | D |
| 19216-0 | 5 | 55 | 32 | 10 | Plastique | Cosses 6.35mm | 425 Volts | -25°C / +70°C | D |
| 19221-a | 6 | 55 | 32 | 10 | Plastique | Cosses 6.35mm | 425 Volts | -25°C / +70°C | D |
| 19227-0 | 7 | 58 | 36 | 10 | Plastique | Cosses 6.35mm | 425 Volts | -25°C / +70°C | C |
| 19222-0 | 8 | 58 | 36 | 10 | Plastique | Cosses 6.35mm | 425 Volts | -25°C / +70°C | C |
| 19223-0 | 10 | 70 | 36 | 10 | Plastique | Cosses 6.35mm | 425 Volts | -25°C / +70°C | C |
| 19224-0 | 14 | 70 | 40 | 10 | Plastique | Cosses 6.35mm | 425 Volts | -25°C / +70°C | C |
| 19251-0 | 16 | 92 | 40 | 10 | Plastique | Cosses 6.35mm | 425 Volts | -25°C / +70°C | C |
| 19225-0 | 18 | 92 | 40 | 10 | Plastique | Cosses 6.35mm | 425 Volts | -25°C / +70°C | C |
| 19252-0 | 20 | 92 | 40 | 10 | Plastique | Cosses 6.35mm | 425 Volts | -25°C / +70°C | C |
| 19226-0 | 22 | 92 | 40 | 10 | Plastique | Cosses 6.35mm | 425 Volts | -25°C / +70°C | C |
| 19257-0 | 25 | 92 | 45 | 10 | Plastique | Cosses 6.35mm | 425 Volts | -25°C / +70°C | C |
| 19256-0 | 30 | 92 | 45 | 10 | Plastique | Cosses 6.35mm | 425 Volts | -25°C / +70°C | C |